



Recorder



Flow



Pressure



Temp



Analyzer



Level

Datasheet

Ultrasonic level transmitter

SIN-MP

Sinomeasure

Committed to process automation solutions

Tel: 86-13336194863

E-mail: info@sinomeasure.com

www.sino-measure.com

Datasheet

Ultrasonic level transmitter SIN-MP

The ultrasonic level transmitter is a low-cost, non-contact and easy-to-install measurement device. It is able to meet the every-day needs of commercial production, as well serving a more specialized role in the technologically advanced aerospace industry, thus placing it firmly in the category of high-level measurement technology. Unlike other level indicators with limited uses, the easy-to-install ultrasonic level indicator is a highly accurate device with enough specialized uses to ensure that the needs of the customer are met.

Applications

- Sewage/waste water/tapwater treatment equipment. Such as silos, open tanks , dams and wells
- Liquids such as edible-oils, sauces and beverages
- Chemical material such as solvent, paints, carbonic acid, water lime slurry and wax
- Granular materials such as flour, wheat and corn
- Chemical fibers, petrochemical materials such as plastic powders, plastic granules and plastic chips



Features

- Non-contact
- Not effected by material property, such as pressure environments, viscosity and specific

Ultrasonic level meter

gravity;


- Integrated keypad with security code
- Easy installation and low operating costs
- Can be used in a versatile of application
- Maintenance-free
- Easy to set program no need to train personal
- Fully isolated analog 4-20ma output
- Better accuracy and stability in difficult conditions
- Internal temperature compensation improves

accuracy

Principle

The principle of operation of the ultrasonic sensor system is to use the ultrasonic pulses which are transmitted by the transducer to the surface to be monitored and are reflected back to the transducer, the time period between transmission and reception of the sound pulses is directly proportional to the distance between the transducer and surface

The latest microcomputer technology and the proven processing software select the level echo from among any number of false echoes and calculate the exact distance to the product surface.

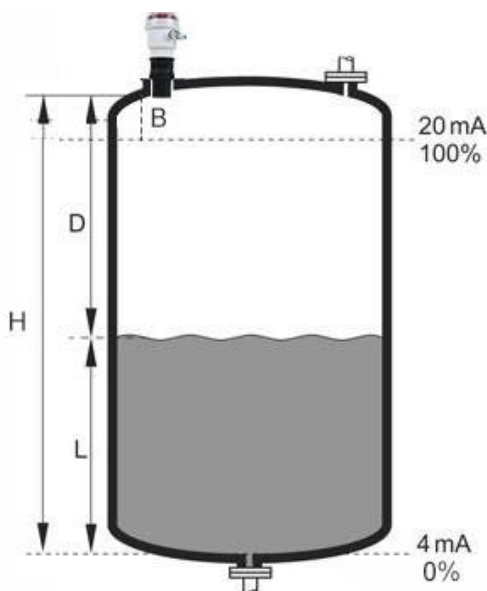

B = Blanking distance

D = Distance from transducer to material surface

L = Height in silo

The distance D is determined from the velocity of sound and the time period t by the formula:

$$D = V \cdot T / 2$$

Example:


With the velocity of sound = 334.1 M/s, a time period of 60m/s corresponds to a transmission path of 20.046M and thus to a distance of 10.023M.

An integrated temperature sensor detects the temperature in the vessel and compensates the influence of temperature on the signal running time.


Parameters	
Product	Ultrasonic level transmitter
Model	SIN-MP
Measure range	5m,10m (Optional)
Blind zone	≤0.35m
Accuracy	0.5%F.S
Beam angle	8° (range 5m),10° (range 10m)
Display	OLED
Display resolution	1mm or 0.1%FS
Power	18-28 VDC
Power consumption	5W
Output (optional)	4~20mA RL>500Ω (standard)
	RS485
	2 relays (AC: 3A 250V)
Storage temperature	-20~70℃
Working temperature	-20~60℃
Relative humidity	(10~85)% (no condensation)
Temperature compensation	Automatic
Installation	Thread / Flange
Ingress Protection	IP65
Measure type	Level / Distance

Installation


Keep transducer perpendicular to liquid.

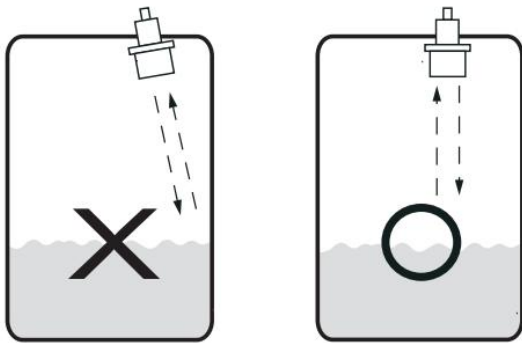


The transducer should not be mounted too close to the tank wall, the build-up on the tank wall cause false echoes.

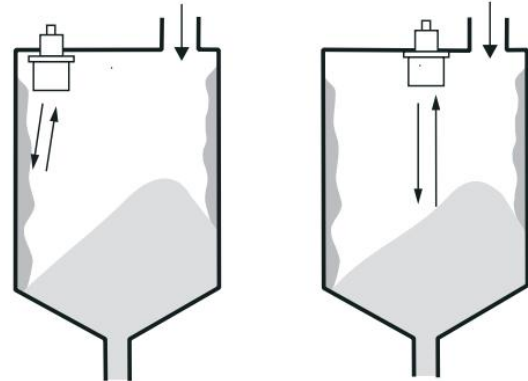


Mount the transducer away from the inlet to avoid false echoes.

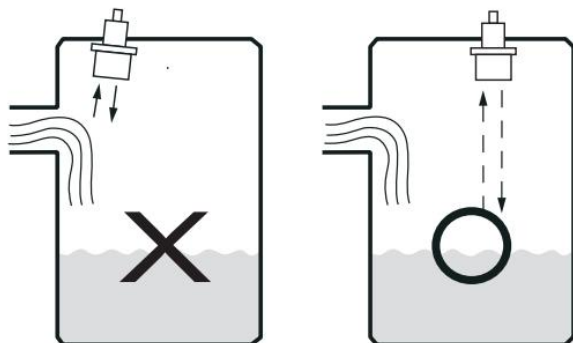


When you mount the transducer on the solid tank, the transducer must point to the tank outlet.

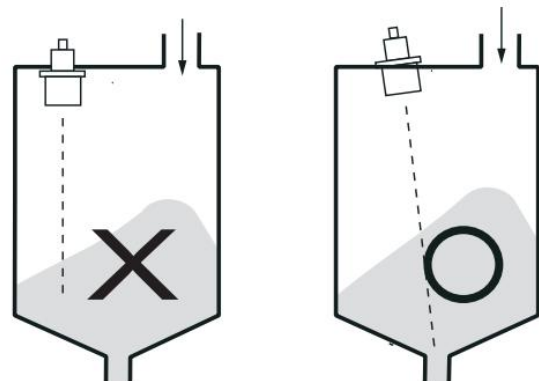


The transducer should not be mounted too close to the tank wall, the bracket can cause strong false echoes.

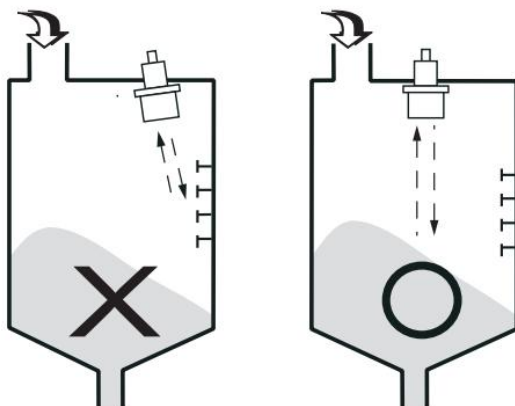


As is illustrated by the figure on the right, the transducer should be mounted on the top of guide tube to prevent the false echoes from turbulence and foam. The guide tube should come with a vent hole at top of the tube to allow the liquid vapor go out of the tube.

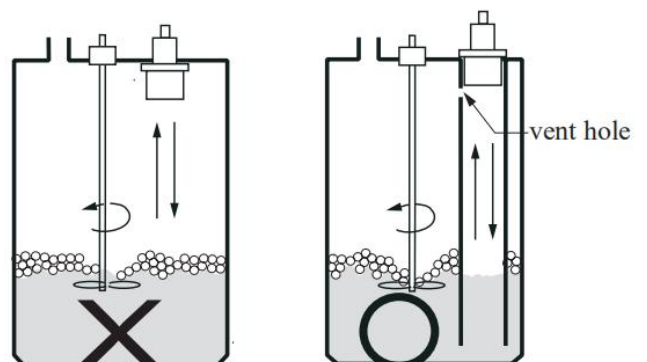

Dimension

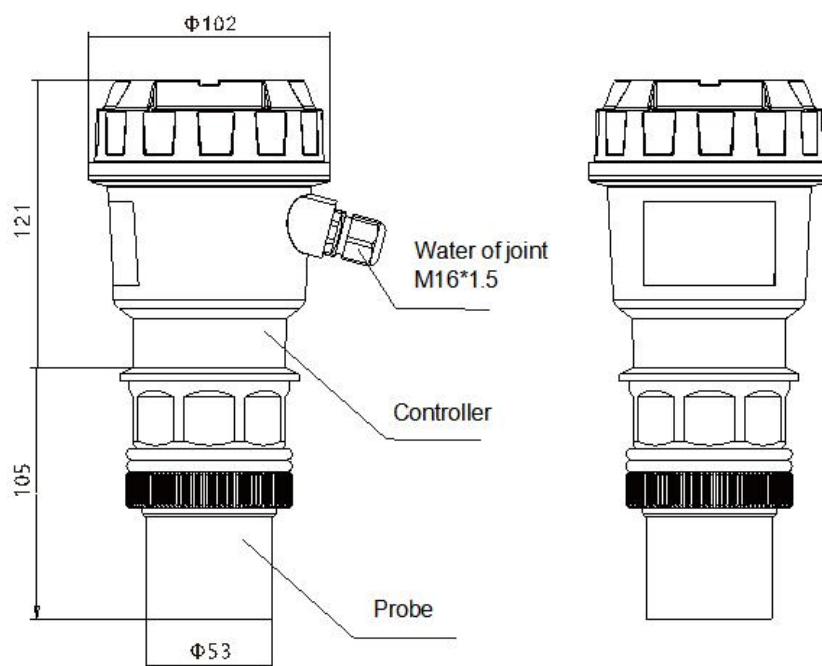

M60×2 or G2 Thread Sensor (5m/10m)

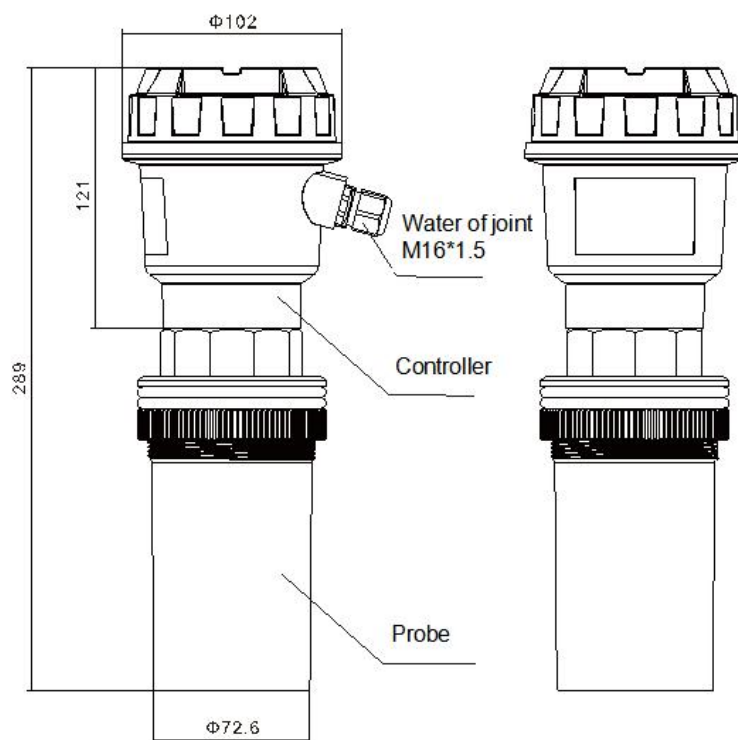

M78×2 Thread Sensor (15m)

Ordering code

SIN-MP								
SIN-MP	-	-	-	-	-	-	-	-
Measurement Range	C							
and Thread Type	D							
Probe Material		NS						
		N6						
Accuracy			K					
				A1				
Output and Power Supply				SP				
				SG				
Electrical Interface, Housing Material, and Ingress Protection					WB			
						EA		
Accessories							EC	

Description

Integrated Type Ultrasonic Level Transmitter

5m, G2

10m, G2

Plastic ABS

Polytetrafluoroethylene (PTFE)

0.5 Class

2-Wire 4-20mA

4-20mA + Dual SPST +RS485, 24VDC

4-20mA + Dual SPST, 24VDC

M16×1.5 Cable Gland, Plastic

ABS, IP65

L-shaped Stainless Steel Mounting Bracket, 0.8m

Polycarbonate (PC) Protective Cover